



PRODUCT FEATURES :

- Universal subframe exclusive to Metal Pless
- Double action hydraulics "Pression Maxx" exclusive to Metal Pless
- 180° multiple hydraulic side wing positions
- Side wings made of "Heavy duty" steel CHT400
- SOFT drive mechanical steel trip edge heavy duty multi-section 3/4" x 6" x 24" (HD)
- Mobile steel trip edge following the imperfection of roads, exclusive Metal Pless system, reduces up to 50% the use of salt and abrasives (LE)
- Carbide cutting edge on main mouldboard only (LE)
- SOFT drive mechanical steel trip edge on the wings
- 3 adjustable crossover relief valve for hydraulic protection on the side wings and power angle system
- Skid shoes (CHT400 steel) mounted to the back of the cutting edge (HD)
- Wings have self-leveling abrasion shoes made of CHT400 steel
- Curb runners on abrasion shoes
- Lateral floating of the blade
- Adjustable angulation of the blade
- Baked powder paint
- This system requires 3 or 4 sets of oil outlets

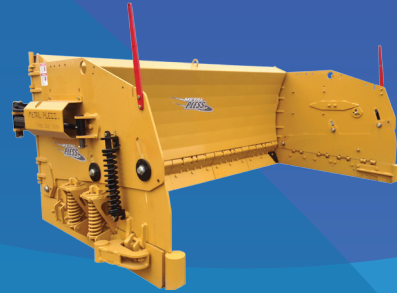

OPTIONS :


- HighSpeed (Accentuated curve of the mouldboard, see picture)
- * 3 point hitch attachment
- Carbide cutting edge
- Non standard colour
- Nitrogen accumulator package installed on the up and down cylinder
- Electric valve and Joystick (Electric over hydraulic 4 spools mounted on blade with electric control and necessary cable for the installation in the tractor cab)



HighSpeed HS



LiveEdge LE



Universal mount
Metal Pless exclusivity

Some basics variations on blade positions



Model	Blade position & width			Height & width of the side wings	Application	Approx. weight
	Box	Scoop	Extended			
CT1048-18	10'	14'	18'	48"	100 HP & up	3100 lbs
*CT1048-20	10'	15'	20'	48" x 60"	100 HP & up	3350 lbs
CT1248-20	12'	16'	20'	48"	125 HP & up	3400 lbs
*CT1248-22	12'	17'	22'	48" x 60"	125 HP & up	3630 lbs

*Available only for tractors with a 3 point hitch in front.

The width of the blade does not determine the real dimension of the product. Pictures might show options.

