

MORE THAN
40 YEARS
1976

**METAL
PLESS**

SNOW PLOWS

*Clearing the way
to a safer environment!*



**METAL
PLESS.TV**



**OUR BLADES
IN ACTION!**

Scan with your
camera application
on any phone

**METAL PLESS
LIVE EDGE**
Technology

THE METAL PLESS STORY





ABOUT US

METAL PLESS, WORLD LEADER IN INNOVATION!

Our philosophy is to build a heavy-duty product that is built to last with the highest quality materials and workmanship available to us.

This high level of quality resists corrosion and requires less maintenance.

With our advanced design we will increase your productivity.

**We understand your snow
removal needs.**

INVERSEMAXX EXT

- Extendable plow
- Rotating side wings
- Parallel lift subframe



Rotating side wings



RB-LE
RUBBER LIVE EDGE

Available in RB-LE, rotating side wings or fixed wings

Includes tractor subframe.

This system requires 2 sets of oil outlets.

Not included: hydraulic hoses from the blade to the tractor.

MODEL	BLADE DIMENSIONS			APPROX. WEIGHT
	BOX	HEIGHT	EXTENDED	
INVEXT 6.5-11.5 RB-LE	6'6"	32"	11'6"	1 850 lbs
INVEXT 7-13 RB-LE	7'	36"	13'	2 000 lbs

Prices, specs, models and/or model numbers are subject to change.

OPTIONS (not included)

- Non standard color (NSC1).

Ideal for residential use, this reversible and extendable plow offers unparalleled versatility on the market.

Thanks to its rotating side wings, the InverseMaxx EXT is as effective at pushing as it is at pulling snow.



TECHNICAL SHEET



SCAN ME
with your camera
application
on any phone

INVERSE MAXXX EXT

NEW



RB-LE
RUBBER LIVE EDGE

ALSO AVAILABLE

- Non extendable
- With hydraulic wings
- Parallel lift subframe



AGRIMAXX

- Hydraulic wings
- Hydraulic angle
- Subframe



STD
STANDARD

Available in STD, HD or LE

Includes angular system and tractor subframe.

This system requires 4 sets of oil outlets.

Not included: hydraulic hoses from the blade to the tractor.

MODEL	BLADE DIMENSIONS			APPLICATION	APPROX. WEIGHT
	BOX	HEIGHT	EXTENDED		
AGLT 0527-10 STD	5'	27"	10'	40-50 HP	982 lbs
AGLT 0627-11 STD	6'	27"	11'	50-60 HP	1 100 lbs
AGLT 0727-12 STD	7'	27"	12'	50-70 HP	1 165 lbs
AGH 0630-11 STD or HD	6'	30"	11'	65-80 HP	1 446 lbs
AGH 0730-12 STD or HD	7'	30"	12'	65-80 HP	1 501 lbs
AGH 0830-13 STD, HD or LE	8'	30"	13'	70-80 HP	1 556 lbs
AGH 0736-13 HD or LE	7'	36"	13'	60-90 HP	1 868 lbs
AGH 0836-14 STD, HD or LE	8'	36"	14'	80-100 HP	2 11 lbs
AGH 0936-15 STD, HD or LE	9'	36"	15'	90-125 HP	2 100 lbs
* AGH 0836-16 HD or LE	8'	36"	16'	90-125 HP	2 200 lbs
AGH 1036-16 STD, HD or LE	10'	36"	16'	100-125 HP	2 188 lbs
AGH 1236-18 STD, HD or LE	12'	36"	18'	100-125 HP	2 380 lbs
AGH 0842-15 HD or LE	8'	42"	15'	125 HP and up	2 427 lbs
* AGH 0842-16 HD or LE	8'	42"	16'	125 HP and up	2 502 lbs
AGH 1042-17 HD or LE	10'	42"	17'	125 HP and up	2 582 lbs
AGH 1242-19 STD, HD or LE	12'	42"	19'	125 HP and up	2 768 lbs

* With subframe MKS2P.


Prices, specs, models and/or model numbers are subject to change.



OPTIONS (not included)

- Tire saver (PPLT or PP).
- Nitrogen accumulator package installed on the lift cylinder (AAC).
- Electric hydraulic diverter valve 4 sets of oil outlets 12 volts (DVDE3 or DVDE4) 13 or 24 GPM to be specified.
- Non standard color (NSC1).
- 3 point hitch attachment (A3P, A3PGF or A3PGB).
- Curb runners (CR...).
- 3/4" x 6" teflon cutting edge (TCE3/4).
- Carbide cutting edge (CCE).
- Electric valve and joystick (JSC4): electric over hydraulic 4 spools mounted on blade with electric control and necessary cable for the installation in the tractor cab.


BLADE POSITIONS



AGRIMAXX


Snow plow with hydraulic wings and angle.
The AgriMaxx pusher is installed in front of a tractor with a Universal Subframe exclusive to Metal Pless.

TECHNICAL SHEET



SCAN ME
with your camera
application
on any phone

AGRIMAXX



LE

LIVE EDGE



HD

SOFT DRIVE TRIP EDGE



MAXXPRO

- Hydraulic wings
- Hydraulic angle



MAXXPRO

Industrial snow plow with hydraulic wings and angle.

The MaxxPro is installed on a wheel loader.

TECHNICAL SHEET



SCAN ME with your camera application on any phone

MAXXPRO



LE
LIVE EDGE



HD
SOFT DRIVE TRIP EDGE



Available in HD, LE or RB-LE

This system requires 1 set of oil outlets.

Not included: hydraulic hoses and connectors from the blade to the vehicle.

MODEL	BLADE DIMENSIONS			APPLICATION	APPROX. WEIGHT
	BOX	HEIGHT	EXTENDED		
PRO 0848-18	HD or LE 8'	48"	18'	25 000 lbs and up	4 700 lbs
PRO 0848-20	HD or LE 8'	48"	20'	25 000 lbs and up	4 900 lbs
PRO 1048-18	HD or LE 10'	48"	18'	25 000 lbs and up	4 800 lbs
PRO 1048-20	HD or LE 10'	48"	20'	25 000 lbs and up	5 000 lbs
PRO 1048-22	HD or LE 10'	48"	22'	25 000 lbs and up	5 200 lbs
PRO 1048-26	HD or LE 10'	48"	26' (van)	25 000 lbs and up	5 900 lbs
PRO 1248-20	HD or LE 12'	48"	20'	30 000 lbs and up	5 200 lbs
PRO 1248-22	HD or LE 12'	48"	22'	30 000 lbs and up	5 400 lbs
PRO 1248-24	HD or LE 12'	48"	24'	30 000 lbs and up	5 600 lbs
PRO 1248-28	HD or LE 12'	48"	28' (van)	30 000 lbs and up	6 300 lbs
PRO 1448-25	HD or LE 14'	48"	25'	35 000 lbs and up	6 400 lbs
PRO 1648-30	HD or LE 16'	48"	30'	40 000 lbs and up	7 000 lbs
PRO 2048-36	HD or LE 20'	48"	36'	50 000 lbs and up	10 000 lbs
PRO 2460-44	HD or LE 24'	60"	44'	60 000 lbs and up	15 000 lbs
PRO 3260-60	HD or LE 32'	60"	60'	70 000 lbs and up	18 000 lbs


Prices, specs, models and/or model numbers are subject to change.

ALSO AVAILABLE



RB-LE
RUBBER LIVE EDGE

BLADE POSITIONS



OPTIONS (not included)

- Carbide cutting edge (CCE).
- Non standard color (NSC1).
- Electric valve and joystick (JSC3) 12 or 24 volts: electric over hydraulic 1 spools mounted on blade with electric control and necessary cable for the installation in the tractor cab..
- Power angle max. 102" (MA102) only available on 10' models.

FOLD DOWN WINGS

MAXXPRO VAN



METAL
PLESS



METAL
PLESS

METAL PLESS is the only manufacturer to offer 8' hydraulic wings with a fold down option.

A 'MUST' for distribution centers! Greatly increases efficiency.

MORE
INFORMATION



SCAN ME

PLOWMAXX

- Hydraulic wings
- Hydraulic angle



PLOWMAXX

Snow plow with hydraulic wings and angle.

The PlowMaxx can be installed on a skid steer, backhoe or wheel loader.

TECHNICAL SHEET



SCAN ME
with your camera application on any phone

PLOWMAXX



LE
LIVE EDGE



STD
STANDARD

Available in STD, HD or LE

This system requires 1 set of oil outlets.

- Not included: - hydraulic hoses from the blade to the vehicle.
- quick coupler

MODEL	BLADE DIMENSIONS			APPLICATION	APPROX. WEIGHT
	BOX	HEIGHT	EXTENDED		
PLLT 04.527-8.5	STD 4'6"	27"	8'6"	6 000 lbs max.	875 lbs
PLLT 0527-10	STD 5'	27"	10'	6 000 lbs max.	1 114 lbs
PLLT 0627-11	STD 6'	27"	11'	6 000 lbs max.	1 242 lbs
PLLT 0727-12	STD 7'	27"	12'	6 000 lbs max.	1 297 lbs


PLSS 0630-11	STD or LE 6'	30"	11'	12 000 lbs max.	1 640 lbs
PLSS 0730-12	STD or HD 7'	30"	12'	12 000 lbs max.	1 740 lbs
PLSS 0830-13	STD, HD or LE 8'	30"	13'	12 000 lbs max.	1 930 lbs

PLBH 0736-13	HD or LE 7'	36"	13'	18 000 lbs max.	2 107 lbs
PLBH 0836-14	STD, HD or LE 8'	36"	14'	18 000 lbs max.	2 250 lbs
PLBH 0936-15	STD, HD or LE 9'	36"	15'	20 000 lbs max.	2 340 lbs
PLBH 0836-16	HD or LE 8'	36"	16'	20 000 lbs max.	2 435 lbs
PLBH 1036-16	STD, HD or LE 10'	36"	16'	20 000 lbs max.	2 427 lbs
PLBH 1236-18	STD, HD or LE 12'	36"	18'	20 000 lbs max.	2 620 lbs

PLLD 0842-15	HD or LE 8'	42"	15'	25 000 lbs max.	2 842 lbs
PLLD 0842-16	HD or LE 8'	42"	16'	25 000 lbs max.	3 000 lbs
PLLD 1042-17	HD or LE 10'	42"	17'	25 000 lbs max.	3 205 lbs
PLLD 1042-18	HD or LE 10'	42"	18'	25 000 lbs max.	3 277 lbs
PLLD 1242-19	STD, HD or LE 12'	42"	19'	25 000 lbs max.	3 326 lbs


Prices, specs, models and/or model numbers are subject to change.

ALSO AVAILABLE



HD
SOFT DRIVE TRIP EDGE


BLADE POSITIONS




OPTIONS (not included)

- Quick coupler.
- Electric hydraulic diverter valve 3 sets of oil outlets 12 or 24 volts (DVDE3) 13 GPM maximum capacity, Bobcat 7 pins.
- Carbide cutting edge (CCE).
- Curb runners (CR36-STD).
- Non standard colour (NSC1).
- Teflon cutting edge 3/4" x 6" (TCE3/4).
- Electric valve and joystick (JSC3)
12 or 24 volts: electric over hydraulic 3 spools mounted on blade with electric control and necessary cable for the installation in the tractor cab..

TRIP EDGE ON THE WINGS

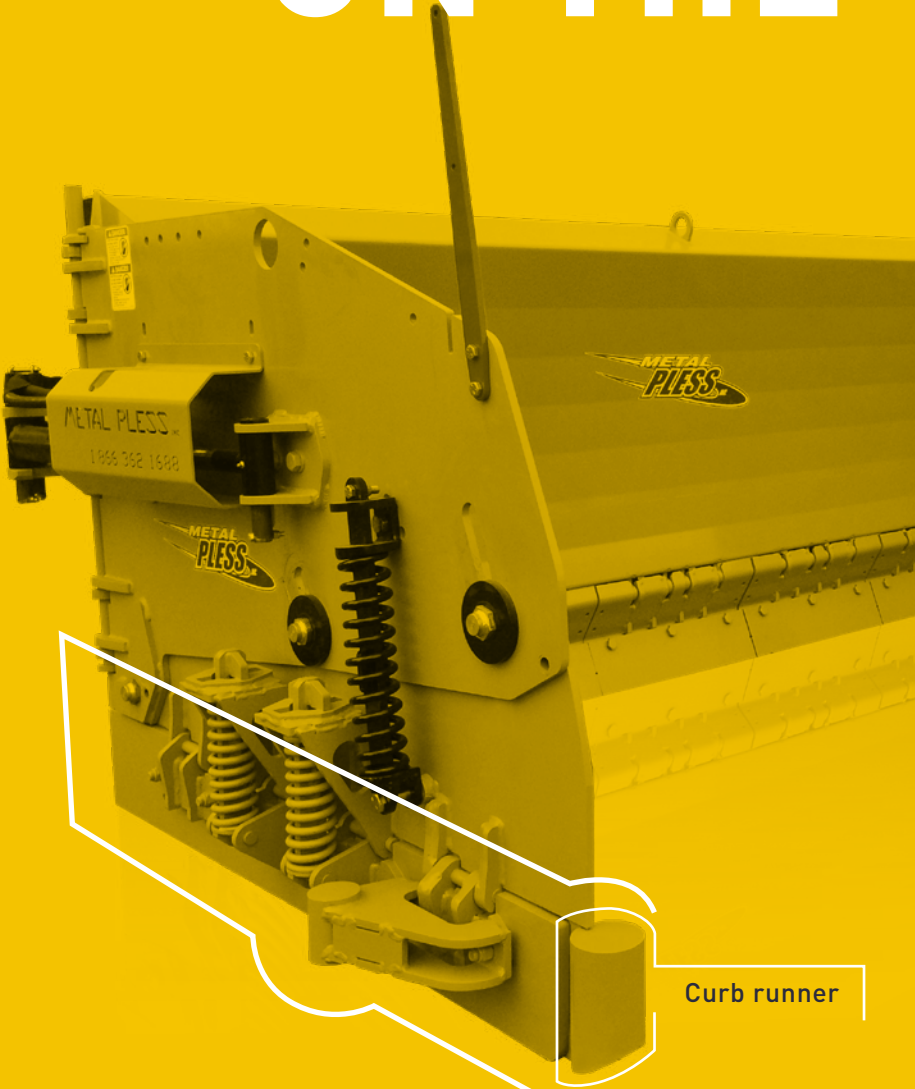

Curb runner

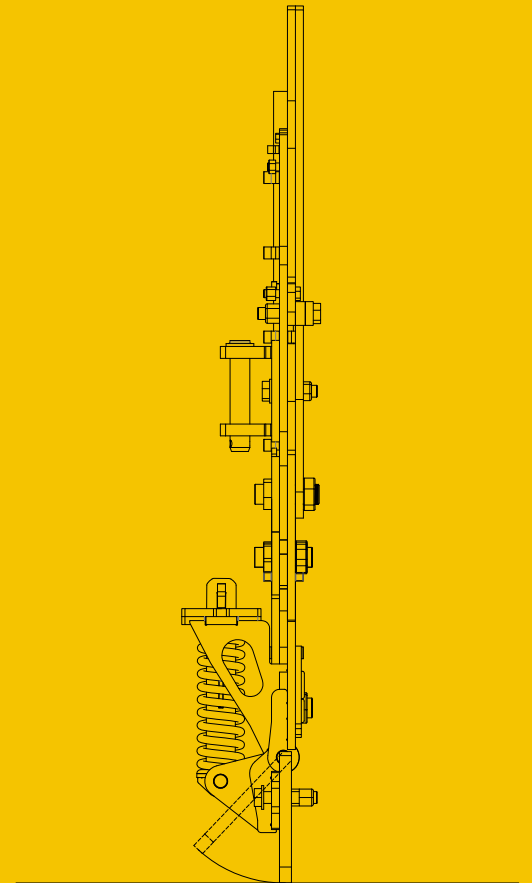

Available on HD and Live Edge models. The bottom part of the wing can trip if an obstacle is struck.

The cutting edge can trip without creating an impact on the motorized vehicle. Safer for the operator and reduces damage to equipment!

MORE
INFORMATION



SCAN ME

LATERAL & VERTICAL FLOAT



MORE
INFORMATION



SCAN ME

Automatically follows the imperfections of the pavement. Our system incorporates an adjustable oscillating mechanism for better control.

Increase plowing efficiency and no need to go over the same area multiple times.

Slip hitch design allows to follow surface variations. Reduces operator fatigue and increase plowing efficiency. Cutting edges wear evenly and increase plow life.

LIVEBOXX

- Fixed wings



LIVEBOXX

Box plow with fixed wings and "Live Edge" trip system.

LiveBoxx pusher is installed on a skid steer, backhoe or wheel loader.

TECHNICAL SHEET



SCAN ME with your camera application on any phone

LIVEBOXX



LE
LIVE EDGE



Available in LE

Includes bucket mount or adaptor plate.

Some assembly is required from transportation mode to work mode.

MODEL	BLADE DIMENSIONS		SIDE GATE DEPTH	APPROX. WEIGHT
	WIDTH	HEIGHT		
LBX 0832 LE	8'	32"	36"	1 345 lbs
LBX 1032 LE	10'	32"	36"	1 550 lbs
LBX 1232 LE	12'	32"	36"	1 760 lbs
LBX 1236 LE	12'	36"	36"	1 935 lbs
LBX 1042 LE	10'	42"	42"	2 250 lbs
LBX 1242 LE	12'	42"	42"	2 565 lbs
LBX 1442 LE	14'	42"	42"	2 805 lbs
LBX 1642 LE	16'	42"	42"	3 045 lbs
LBX 1842 LE	18'	42"	42"	3 285 lbs
LBX 2042 LE	20'	42"	42"	3 525 lbs
LBX 1248 LE	12'	48"	48"	2 615 lbs
LBX 1448 LE	14'	48"	48"	3 305 lbs
LBX 1648 LE	16'	48"	48"	3 545 lbs
LBX 1848 LE	18'	48"	48"	3 785 lbs
LBX 2048 LE	20'	48"	48"	4 025 lbs

Prices, specs, models and/or model numbers are subject to change.

OPTIONS (not included)

- Quick coupler.
- Non standard color (NSC1).

The width of the blade does not determine the real dimension of the product. Pictures shown might have some options.

RUBBERMAXX

- Hydraulic wings
- Hydraulic angle (optional)



RUBBERMAXX

Snow plow with rubber cutting edge. It can be installed with or without angulation.

The RubberMaxx can be installed on agricultural loader "arms", skid steer, backhoe or on the front of a tractor with a Universal Subframe exclusive to Metal Pless.

TECHNICAL SHEET



SCAN ME
with your camera application on any phone

RUBBERMAXX



RB
RUBBER EDGE



Available in RB only

This system requires 1 or 4 sets of oil outlets.
Not included: - hydraulic hoses from the blade to the vehicle.
- quick coupler

MODEL	BLADE DIMENSIONS			APPLICATION	APPROX. WEIGHT
	BOX	HEIGHT	EXTENDED		
RBX 0626-11 ^{RB}	6'	26"	11'	40-60 HP	900 lbs
RBX 0730-13 ^{RB}	7'	30"	13'	50-80 HP	1 350 lbs
RBX 0736-14 ^{RB}	7'	36"	14'	60-90 HP	1 450 lbs
RBX 0836-15 ^{RB}	8'	36"	15'	90-125 HP	1 550 lbs

Prices, specs, models and/or model numbers are subject to change.


Available in:

- Without angulation (**ReverseMaxx**) includes DVDE2, 12 volts, 13 GPM.
- With angulation (**PlowMaxx**) includes DVDE3, 12 volts, 13 GPM.
- With angulation and subframe (**AgriMaxx**).



OPTIONS (not included)

- Quick coupler.
- Nitrogen accumulator package installed on the lift cylinder (**AAC**) (**AgriMaxx**).
- Non standard color (**NSC1**).
- 3 point hitch attachment (**A3P**).
- Electric hydraulic diverter valve 12 or 24 volts (**DVDE3**) 24 GPM maximum capacity, **Bobcat 7 pins**.

BLADE POSITIONS



HYDRAULIC WINGS 180°

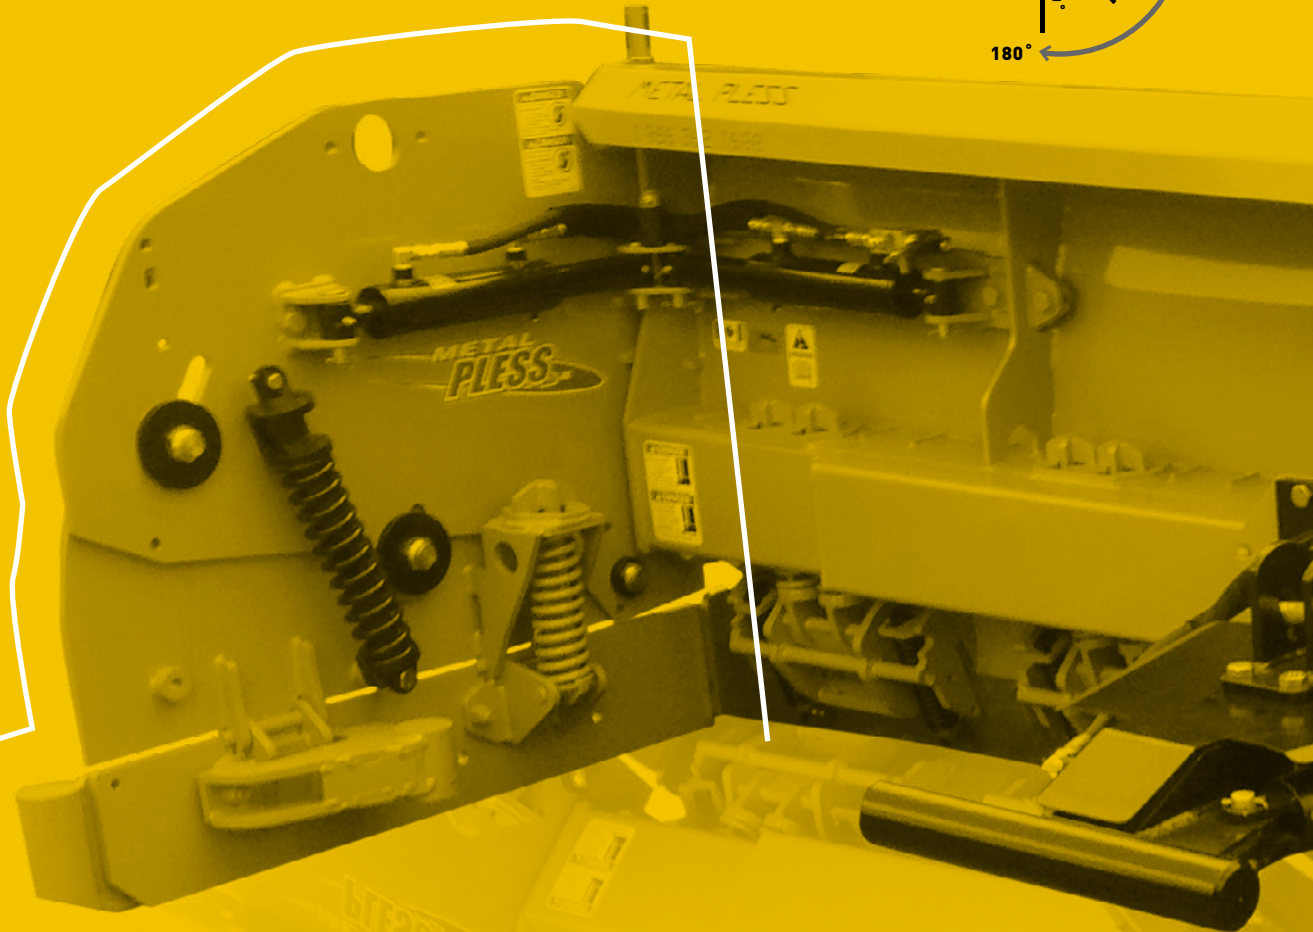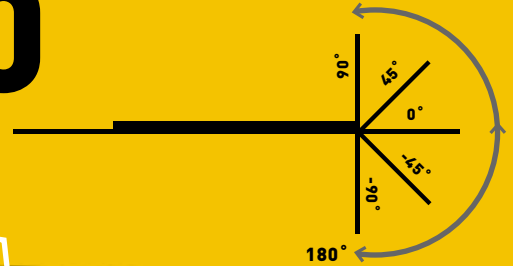

Built from military grade CHT400 steel, our wings are the strongest in the industry.

We use cylinders instead of actuators (hydraulic motors), which offers superior strength.

Two cylinders per wing increases leverage. Wings have an adjustable spring for down pressure.

MORE
INFORMATION



SCAN ME

TRUCKMAXX

- Snow plow for 10 or 12 wheel trucks



TRUCKMAXX

Snow plow for 10 or 12 wheel trucks. The TruckMaxx is ideal for roadways and highways.

TRUCKMAXX



SCAN ME with your camera application on any phone

TRUCKMAXX



HS*Included
High Speed, accentuated curve of the mouldboard.

LE
LIVE EDGE

HD



HD
SOFT DRIVE TRIP EDGE

Available in HD or LE on main blade.

Available in HD or LECCT on side wing.

Not included: hydraulic hoses and connectors from the blade to the truck.

MODEL	FRONT BLADE		SIDE WING		APPLICATION	APPROX. WEIGHT
	WIDTH	HEIGHT	WIDTH	HEIGHT		
TRK 10-08 <small>HD or LE</small>	10'	30"	8'	30"	F550, F650 or equivalent	-
TRK 10-09 <small>HD or LE</small>	10'	30"	9'	30"	F550, F650 or equivalent	-
TRK 12-10 <small>HD or LE</small>	12'	42"	10'	36"	10 Wheels truck	-
TRK 12-11 <small>HD or LE</small>	12'	42"	11'	36"	10 Wheels truck	-
TRK 12-12 <small>HD or LE</small>	12'	42"	12'	36"	10 Wheels truck	-
TRK 12-14 <small>HD or LE</small>	12'	42"	14'	36"	10 or 12 Wheels truck	-

SOLD AS MAIN BLADE ONLY (without harness)

TRK 11LE <small>LE</small>	11'	42"	-	-	10 Wheels truck	2 467 lbs
TRK 12LE <small>LE</small>	12'	42"	-	-	10 Wheels truck	2 720 lbs
TRK 14LE <small>LE</small>	14'	42"	-	-	10 Wheels truck	2 986 lbs

SOLD AS SIDE WING ONLY (without harness)

TRKSW 10 <small>HD ou LE</small>	-	-	10'	36"	10 Wheels truck	-
TRKSW 12 <small>HD ou LE</small>	-	-	12'	36"	10 Wheels truck	-
TRKSW 14 <small>HD ou LE</small>	-	-	14'	36"	10 Wheels truck	-

Prices, specs, models and/or model numbers are subject to change.

OPTIONS (not included)

- Carbide cutting edge (CCE).
- Nitrogen accumulator package installed on the lift cylinder (AAC).
- Non standard color (NSC1).
- Inter-acting Live Edge (LECCT).

MORE
INFORMATION



SCAN ME

LIVE EDGE

PATENTED TECHNOLOGY

METAL PLESS
LIVE EDGE
Technology

LE
LIVE EDGE

**FOLLOWS
AND CONTOURS
the imperfections
of roadways!**

**METAL PLESS has designed the
“Live Edge” technology.**

As a result of this new concept, the snow plow follows and contours the imperfections of roadways and lots allowing 100% contact to the surface being cleaned.

Surfaces are cleared faster, roads and parking lots are safer, and the quantity of salt and abrasive to be spread decreases dramatically.

Up to now, the most advanced technology is by far, “Live Edge”.

HIGH SPEED, ACCENTUATED CURVE OF THE MOULDBOARD.






Scan with your
camera application
on any phone



OUR BLADES
IN ACTION!

WINGMAXX

- Front blade with side wing
- Hydraulic angle

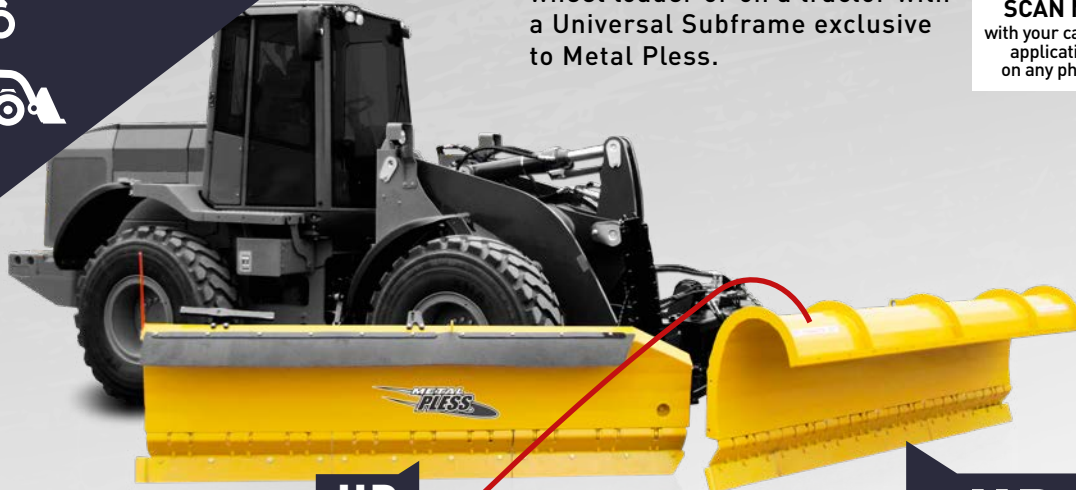

WINGMAXX

Snow plow with hydraulic angle and side wing.

The WingMaxx is installed on a wheel loader or on a tractor with a Universal Subframe exclusive to Metal Pless.

WINGMAXX



SCAN ME
with your camera
application
on any phone

WINGMAXX

HD

HD

SOFT DRIVE TRIP EDGE

HS*Optional

High Speed, accentuated curve of the mouldboard.

Available in HD or LE on main blade.

Available in HD or LECCT on side wing.

HD

LE

LIVE EDGE

Loader: includes quick coupler and DVDE3, 24 volts, 24 GPM.
Tractor: includes subframe only

Includes front blade and side wing.

This system requires 1 or 4 sets of oil outlets.

Not included: hydraulic hoses and connectors from the blade to the vehicle.

MODEL	FRONT BLADE		SIDE WING		APPLICATION	APPROX. WEIGHT
	WIDTH	HEIGHT	WIDTH	HEIGHT		
WING 12-08	HD or LE	12'	42"	8'	36"	150 HP and up 3 600 lbs
WING 12-09	HD or LE	12'	42"	9'	36"	150 HP and up 3 750 lbs
WING 12-10	VHD or LE	12'	42"	10'	36"	150 HP and up 3 900 lbs

Prices, specs, models and/or model numbers are subject to change.

OPTIONS (not included)

- "High Speed" (Accentuated curve of the mouldboard) **(HS)**.
- Carbide cutting edge **(CCE)**.
- Non standard color **(NSC1)**.
- Nitrogen accumulator package installed on the lift cylinder **(AAC)**.
- Electric valve and joystick **(JSC4)**: electric over hydraulic 4 spools mounted on the blade with electric control and necessary cable for the installation in the cab.
- Inter-acting Live Edge **(LECCT)**.

PICKUPMAXX

- Hydraulic wings
- Hydraulic angle



PICKUPMAXX

Snow plow with hydraulic wings and angle.

The PickupMaxx must be installed on a pick-up 1 ton or bigger.

TECHNICAL SHEET



SCAN ME with your camera application on any phone

PICKUPMAXX



HD
SOFT DRIVE TRIP EDGE

Available in STD

Includes angular system and quick coupler.

Not included: hydraulic hoses and connectors from the blade to the pick-up.


MODEL	BLADE DIMENSIONS			APPLICATION	APPROX. WEIGHT
	BOX	HEIGHT	EXTENDED		
PU 350828-13 STD	8'	28"	13'	F350 or equivalent	975 lbs
PU 0828-13 STD	8'	28"	13'	F450, F550 or equivalent	1 175 lbs
PU 0928-14 STD	9'	28"	14'	F350 or equivalent	1 200 lbs

Prices, specs, models and/or model numbers are subject to change.

OPTIONS (not included)


- Carbide cutting edge **(CCE)**.
- 16 GPM electric hydraulic valve **(JSC4)** 12 volts *(contact your sales representative for the installation.*
- Non standard color **(NSC1)**.

BLADE POSITIONS



The width of the blade does not determine the real dimension of the product. Pictures shown might have some options.

BLADE IS CLOSER TO THE VEHICLE

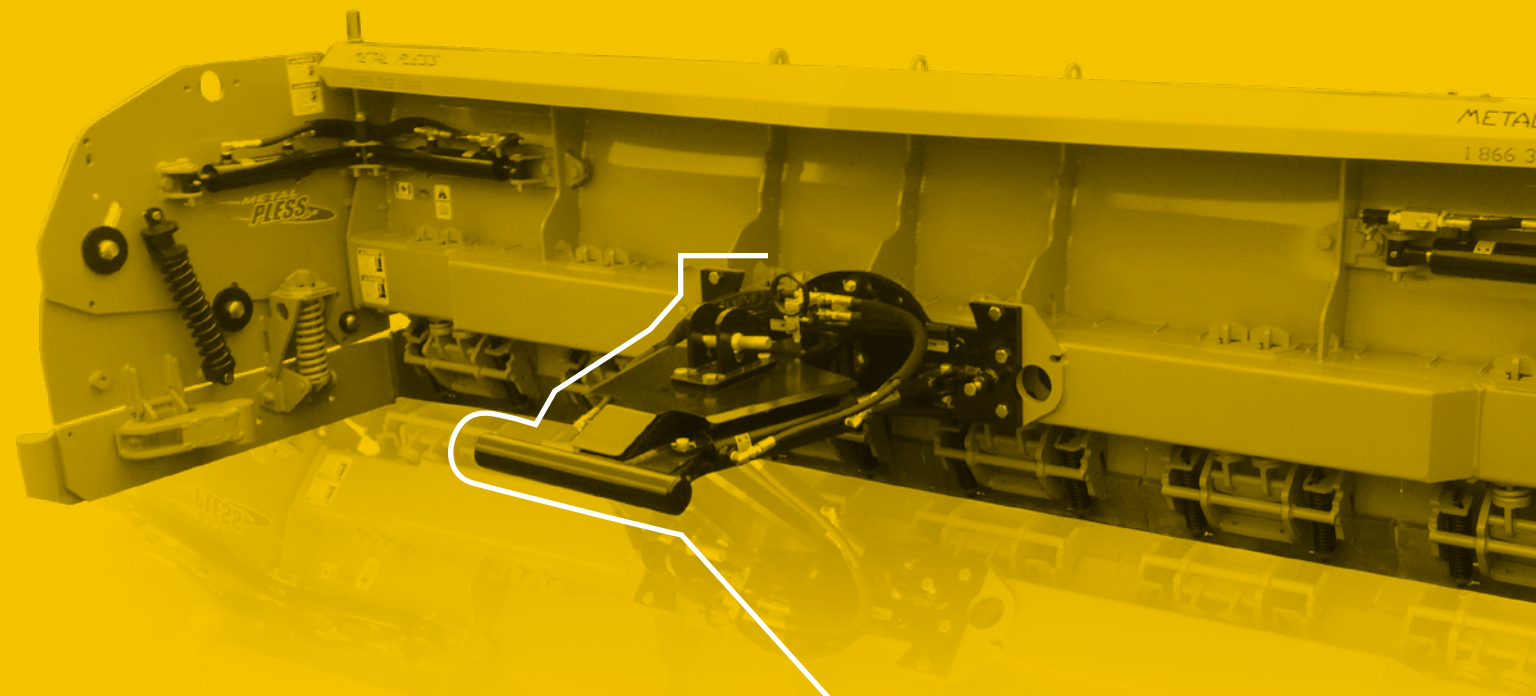

MORE
INFORMATION



SCAN ME

Up to 24" closer than the competition. Greatly reduces wear of the tractor.

Better traction and less bounce when driving down the road.

Increase the life span of the equipment and the vehicle's components (tires, axles, bearings, ...).

REVERSEMAXX

- Hydraulic wings



REVERSEMAXX

Snow plow with hydraulic wings.

The ReverseMaxx is installed on an agricultural loader "arms", skid steer or backhoe.

TECHNICAL SHEET



SCAN ME
with your camera
application
on any phone

REVERSEMAXX



LE
LIVE EDGE



STD
STANDARD

Available in STD, HD or LE

This system requires 1 set of oil outlets.

Not included: - hydraulic hoses from the blade to the vehicle.
- quick coupler

MODEL	BLADE DIMENSIONS			APPLICATION	APPROX. WEIGHT
	BOX	HEIGHT	EXTENDED		
REVLT 0527-10	STD	5'	27"	10'	35-45 HP 1 000 lbs
REVLT 0627-11	STD	6'	27"	11'	45-55 HP 1 130 lbs
REVLT 0727-12	STD	7'	27"	12'	55-65 HP 1 185 lbs
REVM 0630-11	STD or LE	6'	30"	11'	50-60 HP 1 398 lbs
REVM 0730-12	STD or HD	7'	30"	12'	60-80 HP 1 498 lbs
REVM 0830-13	STD, HD or LE	8'	30"	13'	70-90 HP 1 688 lbs
REVM 0736-13	HD or LE	7'	36"	13'	60-90 HP 1 865 lbs
REVM 0836-14	HD or LE	8'	36"	14'	80-100 HP 2 000 lbs
REVM 0936-15	STD, HD or LE	9'	36"	15'	90-125 HP 2 100 lbs
REVM 0836-16	STD, HD or LE	8'	36"	16'	85-125 HP 2 200 lbs
REVM 1036-16	STD, HD or LE	10'	36"	16'	100-125 HP 2 185 lbs
REVM 1236-18	STD, HD or LE	12'	36"	18'	125 HP and up 2 378 lbs

Prices, specs, models and/or model numbers are subject to change.

OPTIONS (not included)


- Quick coupler.
- Carbide cutting edge (CCE).
- Teflon cutting edge 3/4" x 6" (TCE3/4).
- Non standard color (NSC1).

ALSO AVAILABLE



HD
SOFT DRIVE TRIP EDGE

BLADE POSITIONS



The width of the blade does not determine the real dimension of the product. Pictures shown might have some options.

CITYMAXX

- Hydraulic wings
- Hydraulic angle
- Subframe



CITYMAXX

Snow plow with hydraulic wings and angle.

The CityMaxx is installed in front of a tractor with a Universal Subframe exclusive to Metal Pless or on a front 3 point hitch.

TECHNICAL SHEET



SCAN ME
with your camera application on any phone

CITYMAXX



Available in HD or LE

Includes angular system and tractor subframe or 3 point hitch.

This system requires 3 or 4 sets of oil outlets.

Not included: hydraulic hoses and connectors from the blade to the tractor.

MODEL	BLADE DIMENSIONS			APPLICATION	APPROX. WEIGHT
	BOX	HEIGHT	EXTENDED		
CT 1048-18 <small>HD or LE</small>	10'	48"	18'	150 HP and up	3 100 lbs
* CT 1048-20 <small>HD or LE</small>	10'	48"	20'	150 HP and up	3 350 lbs
CT 1248-20 <small>HD or LE</small>	12'	48"	20'	150 HP and up	3 400 lbs
* CT 1248-22 <small>HD or LE</small>	12'	48"	22'	150 HP and up	3 630 lbs

* Available only for tractors with a 3 point hitch in front.

Prices, specs, models and/or model numbers are subject to change.


OPTIONS (not included)

- "High Speed" (accentuated curve of the mouldboard) **[HS]**.
- 3 point hitch attachment **[A3P, A3P6F or A3P6B]**.
- Carbide cutting edge **[CCE]**.
- Electric hydraulic diverter valve 3 or 4 sets of oil outlets 12 volts **[DVDE3 or DVDE4]** 13 or 24 GPM to be specified.
- Non standard color **[NSC1]**.
- Nitrogen accumulator package installed on the lift cylinder **[AAC]**.
- Electric valve and joystick **[JSC3 or JSC4]**: electric over hydraulic 3 or 4 spools mounted on blade with electric control and necessary cable for the installation in the tractor cab.


ALSO AVAILABLE



BLADE POSITIONS




SOFT DRIVE TRIP EDGE

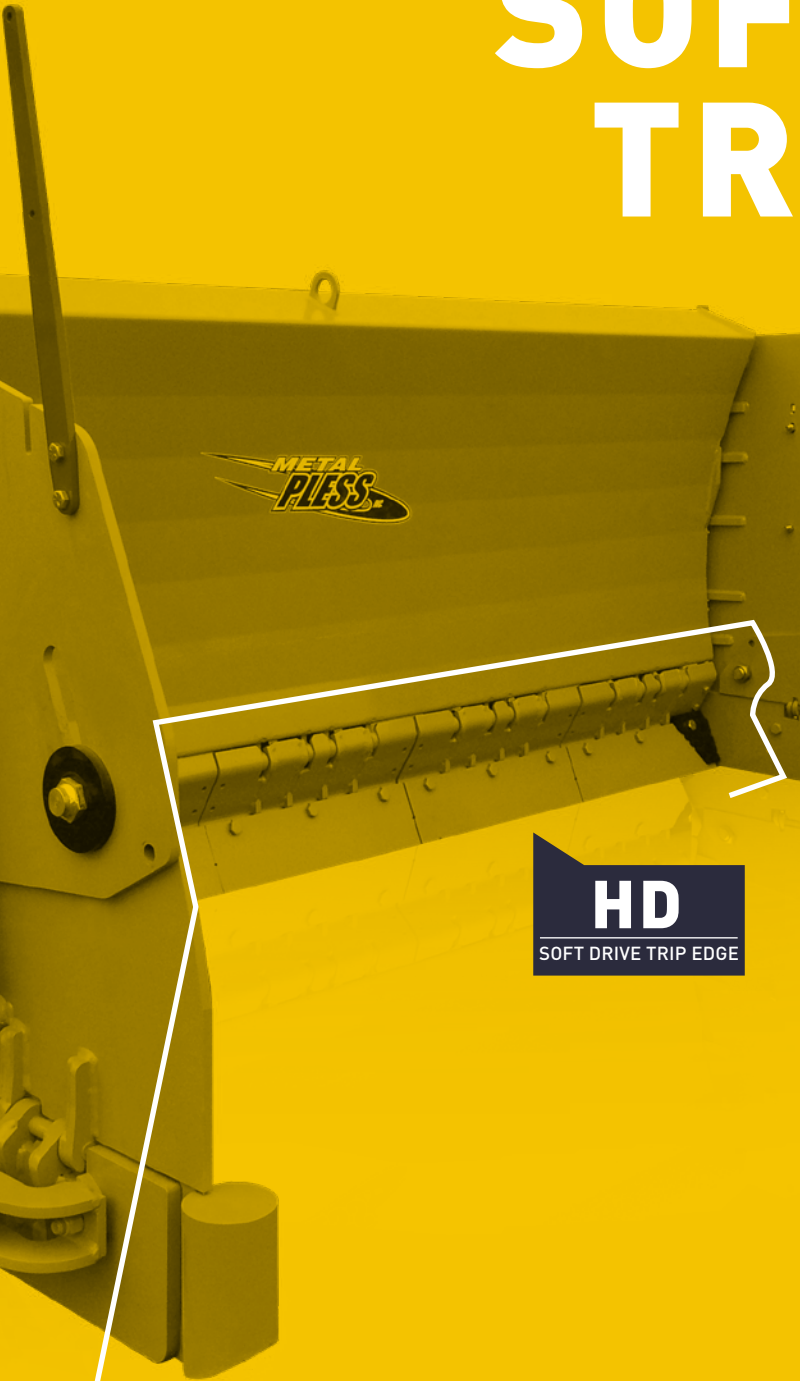

HD
SOFT DRIVE TRIP EDGE

STD

HD

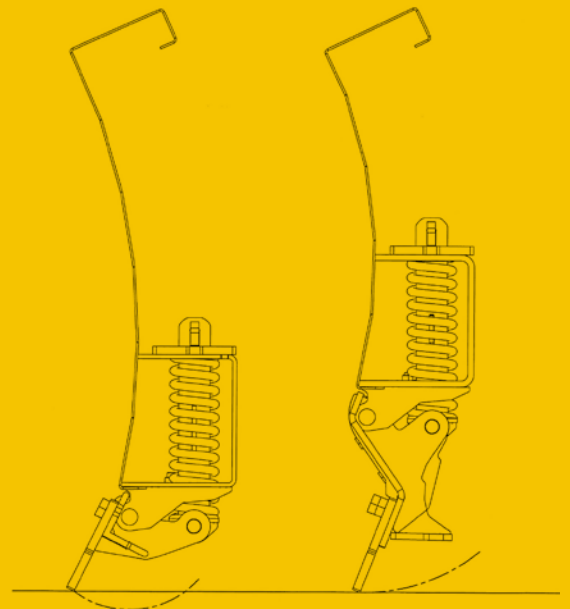

Unique Soft Drive trip edge design allows the individual sections to trip backwards without the blade being lifted upwards, greatly reducing the impact.

MORE
INFORMATION



SCAN ME

metalpless.com

R3MAXX

- Extendable plow
- Reversible plow
- Full tripping system of the blade



R3MAXX

Extendable and reversible (pull back) plow.

The R3Maxx is installed on an agricultural loader.

TECHNICAL SHEET



SCAN ME with your camera application on any phone

R3MAXX



Available in STD

This system requires 1 or 2 sets of oil outlets.
 Not included: - hydraulic hoses from the blade to the tractor.
 - quick coupler

MODEL	BLADE DIMENSIONS				APPLICATION	APPROX. WEIGHT
	BOX	EXTENDED	HEIGHT	DEPTH		
R3M 5.5-9 STD	5'6"	9'	20"	16"	30-45 HP	850 lbs
R3M 6-10 STD	6'	10'	24"	18"	40-65 HP	1 200 lbs
R3M 6.5-11 STD	6'6"	11'	24"	18"	65-80 HP	1 390 lbs
R3M 7-12 STD	7'	12'	32"	24"	80-125 HP	2 400 lbs
R3M 7.5-13 STD	7'6"	13'	32"	24"	125 HP and up	2 530 lbs

Prices, specs, models and/or model numbers are subject to change.

OPTIONS (not included)

- Quick coupler.
- Teflon cutting edge 3/4" x 6" (TCE3/4).
- Non standard color (NSC1).

PLOWMAXX JR

- Hydraulic angle



PLOWMAXX JR

Snow plow with hydraulic angle. The PlowMaxx JR can be installed on a skid steer, backhoe or wheel loader.

TECHNICAL SHEET



SCAN ME with your camera application on any phone

PLOWMAXX JR



STD
STANDARD



Available in STD, HD or LE

This system requires 1 set of oil outlets.

Not included: - hydraulic hoses from the blade to the vehicle.
- quick coupler


MODEL	BLADE DIMENSION		APPLICATION	APPROX. WEIGHT
	WIDTH	HEIGHT		
PLJR 527 STD	5'	27"	30-40 HP	460 lbs
PLJR 627 STD	6'	27"	30-50 HP	500 lbs
PLJR 727 STD	7'	27"	40-60 HP	560 lbs
PLJR 827 STD	8'	27"	50-70 HP	635 lbs
<hr/>				
PLSO 730 STD	7'	30"	60-70 HP	925 lbs
PLSO 830 STD	8'	30"	70-80 HP	975 lbs
PLSO 930 STD	9'	30"	80-90 HP	1 025 lbs
<hr/>				
PLSO 1036 STD, HD or LE	10'	36"	80-100 HP	1 650 lbs
PLSO 1236 STD, HD or LE	12'	36"	100 HP and up	1 950 lbs
<hr/>				
PLSO 1242 STD, HD or LE	12'	42"	125 HP and up	2 375 lbs

Prices, specs, models and/or model numbers are subject to change.

OPTIONS (not included)

- Teflon cutting edge 3/4" x 6" (TCE%).
- Non standard color (NSC1).
- Carbide cutting edge (CCE).
- Quick coupler.

BLADE POSITIONS



ALSO AVAILABLE



LE
LIVE EDGE



HD
SOFT DRIVE TRIP EDGE

The width of the blade does not determine the real dimension of the product. Pictures shown might have some options.

SIDEMAXX

- Sidewalk blade
- Hydraulic angle



TECHNICAL SHEET



SCAN ME with your camera application on any phone

SIDEMAXXX

This system requires 2 sets of oil outlets.
 Not included: hydraulic hoses and connectors from the blade to the vehicle.

MODEL	BLADE DIMENSIONS		APPLICATION	APPROX. WEIGHT
	WIDTH	HEIGHT		
SM 527/60 STD	60"	27"	35 HP and up	550 lbs
SM 530/60LE LE	60"	30"	35 HP and up	725 lbs

Prices, specs, models and/or model numbers are subject to change.

OPTIONS (not included)

- Carbide cutting edge (CCE).
- Joystick and valve (DVDE2).
- Non standard colour (NSC1).

Available in:

- 3 point hitch (category 2)
- Hitch also compatible for Walker, Trackless, SW48, Multihog etc.
- With tractor subframe

Option #1: Heavy duty 18" hydraulic extension.

Option #2: Tilt 12" hydraulic pivot from up/down (requires hydraulic float).

Option #3: 14" hydraulic sideshift (5" to the left and 9" to the right).

Possible options configuration: 1 & 2 / 2 & 3 / 1, 2 & 3.

An additional set of oil outlets are needed per option.

SIDEMAXX-X

- Sidewalk blade
- Hydraulic angle



TECHNICAL SHEET



SCAN ME with your camera application on any phone

SIDEMAXXX-X

This system requires 3 sets of oil outlets.
 Not included: hydraulic hoses and connectors from the blade to the vehicle.

MODEL	BLADE DIMENSIONS			APPLICATION	APPROX. WEIGHT
	STRAIGHT	FRONT & REAR "V"	HEIGHT		
SDX 532 STD	60"	48"	32"	35 HP and up	550 lbs

Prices, specs, models and/or model numbers are subject to change.


OPTIONS (not included)

- Carbide cutting edge (CCE).
- Non standard color (NSC1).
- Electric hydraulic diverter valve 3 sets of oil outlets 12 volts (DVDE3) 13 or 24 GPM to be specified.

Available in:

- 3 point hitch (category 1&2)
- With trackless coupler
- With tractor subframe

BLADE POSITIONS



MAXXEDGE MINI

- Fixed wings
- Offered with a trip system



TECHNICAL SHEET



SCAN ME with your camera application on any phone

MAXXEDGE MINI

Includes skid steer quick coupler.

MODEL	BLADE DIMENSIONS		APPLICATION	APPROX. WEIGHT
	WIDTH	HEIGHT		
MSM 0728 STD	7'	28"	50 HP max.	700 lbs
MSM 0828 STD	8'	28"	50 HP max.	750 lbs

Prices, specs, models and/or model numbers are subject to change.

OPTIONS (not included)

- Teflon cutting edge 3/4" x 6" (TCE %).
- Non standard color (NSC1).
- Quick coupler.

Available with closed top (backdrag) or open top.

PUSHERMAXX MINI

- Fixed wings
- No trip system



TECHNICAL SHEET



SCAN ME with your camera application on any phone

PUSHERMAXX MINI

Includes skid steer quick coupler.

MODEL	BLADE DIMENSIONS		APPLICATION	APPROX. WEIGHT
	WIDTH	HEIGHT		
PSM 0522 STD	5'	22"	30 HP max.	400 lbs
PSM 0622 STD	6'	22"	30 HP max.	450 lbs
PSM 0722 STD	7'	22"	35 HP max.	500 lbs

Prices, specs, models and/or model numbers are subject to change.

OPTIONS (not included)

- Teflon cutting edge 3/4" x 6" (TCE %).
- Non standard color (NSC1).
- Quick coupler.

Available with closed top (backdrag) or open top.

The width of the blade does not determine the real dimension of the product. Pictures shown might have some options.

VMAXX

- Hydraulic angle



VMAXX

Snow blade with hydraulic angle and tilt.

The VMaxx is installed on the front of a tractor with a Universal Subframe exclusive to Metal Pless.

TECHNICAL SHEET




SCAN ME with your camera application on any phone

VMAXX

Blade for recreational use for ATV, snowmobile and cross-country ski trails.



BLADE POSITIONS



Includes hydraulic angular system and tractor subframe.

This system requires 3 sets of oil outlets.

Not included: hydraulic hoses and connectors from the blade to the vehicle.


MODEL	BLADE DIMENSIONS		APPROX. WEIGHT
	WIDTH	HEIGHT	
VM 0725 STD	7'	25"	1 545 lbs
VM 0830 STD	8'	30"	1 580 lbs
VM 0930 STD	9'	30"	1 655 lbs
VM 1030 STD	10'	30"	1 730 lbs

Prices, specs, models and/or model numbers are subject to change.

OPTIONS (not included)

- Non standard colour (NSC1).
- Electric hydraulic diverter valve 3 sets of oil outlets 12 or 24 volts (DVDE3) 13 GPM.

LATERAL FLOAT

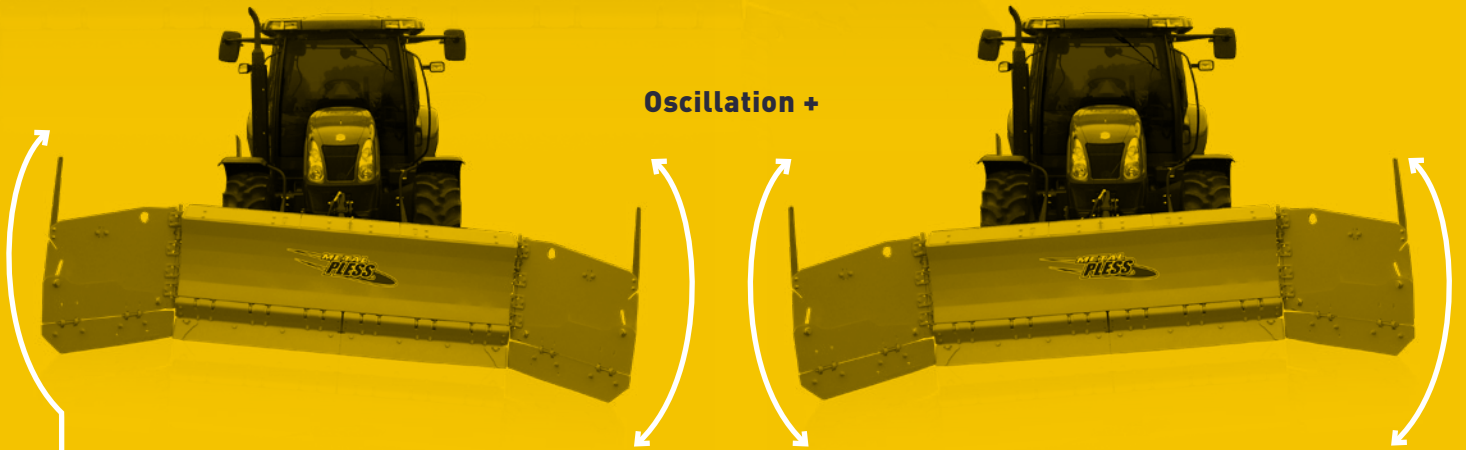

Automatically follows the imperfections of the pavement.

Our system incorporates an adjustable float mechanism for better control. Increase plowing efficiency and no need to go over the same area multiple times.

MORE
INFORMATION



SCAN ME

metalpless.com

EXTENDMAXX

- Extendable plow
- Hydraulic wings
- Hydraulic angle
- Subframe



EXTENDMAXX

Extendable snow plow blade with hydraulic wings and angle.

The ExtendMaxx is installed in front of a tractor with a Universal Subframe exclusive to Metal Pless.

TECHNICAL SHEET



SCAN ME with your camera application on any phone

EXTENDMAXX



HD
SOFT DRIVE TRIP EDGE



Available in HD or LE

Includes angular system and subframe.

This system requires 5 sets of oil outlets.

Not included: hydraulic hoses and connectors from the blade to the tractor.

MODEL	BLADE DIMENSIONS			EXTENDED EXTENSION ONLY	APPLICATION	APPROX. WEIGHT
	BOX	HEIGHT	FULLY EXTENDED			
EXT 0736-17 <small>HD or LE</small>	7'	36"	17'	11'	125 HP and up	2 500 lbs
EXT 0836-19 <small>HD or LE</small>	8'	36"	19'	13'	125 HP and up	2 866 lbs
EXT 1036-21 <small>HD or LE</small>	10'	36"	21'	15'	125 HP and up	3 075 lbs

Prices, specs, models and/or model numbers are subject to change.

ALSO AVAILABLE




LE
LIVE EDGE

OPTIONS (not included)

- Tire saver **(PP)**.
- 3 point hitch attachment **(A3P)**.
- Carbide cutting edge **(CCE)**.
- Non standard colour **(NSC1)**.
- Electric hydraulic diverter valve 5 sets of oil outlets **(DVDES)** 13 or 24 GPM to be specified.
- Nitrogen accumulator package installed on the lift cylinder **(AAC)**.
- Electric valve and joystick **(JSC5)**: electric over hydraulic 5 spools mounted on blade with electric control and necessary cable for the installation in the tractor cab..

BLADE POSITIONS



EXTENDMAXX EX4

- Extendable plow
- Fixed wings



EXTENDMAXX EX4

Extendable snow plow blade installed on a 3 point hitch on the rear of a tractor.

TECHNICAL SHEET




SCAN ME with your camera application on any phone

EXTENDMAXX EX4



STD
STANDARD

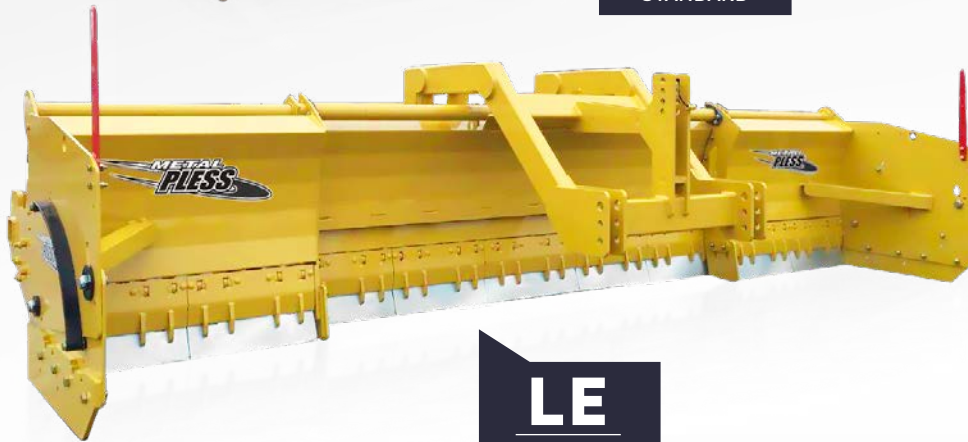

LE
LIVE EDGE



HD
SOFT DRIVE TRIP EDGE

Available in STD, HD or LE

This system requires 1 set of oil outlets.

Not included: hydraulic hoses and connectors from the blade to the tractor.

MODEL	BLADE DIMENSIONS			APPROX. WEIGHT
	BOX	HEIGHT	EXTENDED	
EX4 06-10 STD	6'	24"	10'	904 lbs max.
EX4 07-12 STD	7'	30"	12'	1 610 lbs max.
EX4 08-13 STD	8'	36"	13'	2 205 lbs max.
EX4 08-14 STD	8'	42"	14'	2 700 lbs max.
EX4HD 08-14 HD or LE	8'	36"	14'	3 900 lbs max.
EX4HD 10-16 HD or LE	10'	36"	16'	4 500 lbs max.

Prices, specs, models and/or model numbers are subject to change.

OPTIONS (not included)

- Non standard color (NSC1).

The width of the blade does not determine the real dimension of the product. Pictures shown might have some options.

EXTENDMAXX^{HD}

- Extendable plow
- Hydraulic wings
- Hydraulic angle



EXTENDMAXX^{HD}

Industrial extendable plow with hydraulic wings and angle.
The ExtendMaxx HD is installed on a wheel loader.

TECHNICAL SHEET



SCAN ME with your camera application on any phone

EXTENDMAXX^{HD}



HD
SOFT DRIVE TRIP EDGE



Available in HD or LE

Includes angular system and quick coupler for industrial loader.


This system requires 1 set of oil outlets.

Not included: hydraulic hoses and connectors from the blade to the vehicle.

ALSO AVAILABLE



BLADE POSITIONS



MODEL	BLADE DIMENSIONS			EXTENDED EXTENSION ONLY	APPLICATION	APPROX. WEIGHT
	BOX	HEIGHT	FULLY EXTENDED			
EXHD 0836-19 ^{HD or LE}	8'	36"	19'	13'	20 000 lbs max.	4 350 lbs
EXHD 1036-21 ^{HD or LE}	10'	36"	21'	15'	25 000 lbs max.	4 600 lbs
EXHD 1048-26 ^{HD or LE}	10'	48"	26'	16'	30 000 lbs max.	6 550 lbs
EXHD 1248-29 ^{HD or LE}	12'	48"	29'	19'	45 000 lbs max.	7 300 lbs

Prices, specs, models and/or model numbers are subject to change.

OPTIONS (not included)

- Carbide cutting edge (CCE). - Non standard color (NSC1).

POWDER COAT PAINT PROCESS



COLORED
SNOW PLOW



Match your
snow plow!

The Powder coat process will help keep your plow looking great for years!

Equipment looks cleaner and keep it's resale value! Reduces maintenance.

Standard

Multiple colors available. Colors may appear different due to the printing.

IT'S ALL ABOUT THE **EDGE**

LE

LIVE EDGE

A floating soft drive steel trip edge with carbide inserts for longer wear life, that contours the unevenness of the ground for a cleaner result.

STD

STANDARD

Standard trip edge allows cutting edge to trip back.

HD

SOFT DRIVE TRIP EDGE

Unique Soft Drive trip edge design allows the individual sections to trip backwards without the blade being lifted upwards, greatly reducing the impact.

RB

RUBBER EDGE

Rubber edges are flexible, tough, and quiet, and at same time less likely to damage delicate surfaces.

RB-LE

RUBBER LIVE EDGE

Individual floating rubber edge contouring the unevenness of the ground for a cleaner result while protecting delicate surfaces.

LECCT

INTER-ACTING
LIVE EDGE

Inter-acting Live Edge for hydraulic side wings. The serpentine like movement allows the cutting edge to follow the surface being cleaned without risk of damaging the cutting edges or the area it is riding on.



**METAL
PLESS**

1683, boulevard des Sucreries
Plessisville (QC) G6L 1W4
Canada

Follow us!



☎ 1 819 362.2221
📞 1 866 362.1688

metalpless.com